

OPERATING THE X-08 LOCK

The X-08 lock is an electro-mechanical combination lock. The majority of the insides of the lock are very sensitive electronics. Under no circumstances should the owner/user remove the back plate of these locks.

TO OPERATE:

1



Dial to the left in order to power the lock up. Once the lock is powered up, stop turning and you will be prompted with "E1"

2



Dial the lock back to the right until you reach the first number of the combination. Once you reach the first number, stop. The prompt "E2" should appear approximately 2 seconds after you stop.

3



Continue to dial to the right until you reach the second number in the combination, then stop. Within 2 seconds after you stop, you should be prompted with "E3".

4



Continue to dial to the right until you reach the third and final number of the combination, then stop. Within another 2 seconds, you should then be prompted with "OP". Continue dialing to the right to retract the bolt.

If at any time during the opening process, you are presented with a lightning bolt, you must redial the entire combination.

Should you pass the intended number by 10 or more numbers, continue to dial until the number comes around again. If you pass the intended combination by less than 10 numbers, you may pause, then immediately dial to the left slowly, enabling the lock to "jump back" up to 9 numbers. If at anytime during the "jump back" process you are presented with a lightning bolt, you must redial the entire combination again.

OPERATING THE X-08 LOCK

OPERATING THE X-08 LOCK

The X-08 will accept any number in the combination from "00" to "99". However, you should select a sequence of high-low-high, or low-high-low numbers for your new combination. Avoid numbers that end with "0" or "5" and avoid setting a pattern or using any number twice.


CHANGING THE COMBINATION:

1



Enter the existing combination and retract the bolt.

2

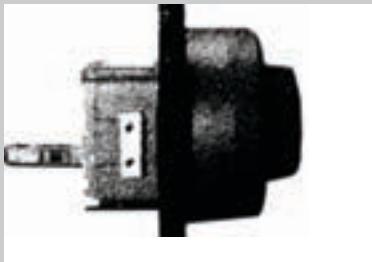

Insert the change key into the holes on the back of the lock.

3



Release the container locking bolts (different containers have different release mechanisms.)

4



Dial left until the change key symbol appears in the upper right hand corner of the display along with "E1".

5



Dial back to the right and enter the current combination, as if you were preparing to open the lock.

OPERATING THE X-08 LOCK

The X-08 lock is an electro-mechanical combination lock. The majority of the insides of the lock are very sensitive electronics. Under no circumstances should the owner/user remove the back plate of these locks.

CHANGING THE COMBINATION:

6




After you dial the last number of the current combination, the symbol "SL" should appear. Dial right to select the desired mode of operation. In most cases, "1" (single combination mode) is used. Once you select "1", the symbol 'dL' (dial left) will appear within about 2 seconds.

7




Dial left until the symbol "EC" appears. Dial right until you reach the first number of your new combination, then stop. Within about 2 seconds, the symbol "E2" will appear.

8

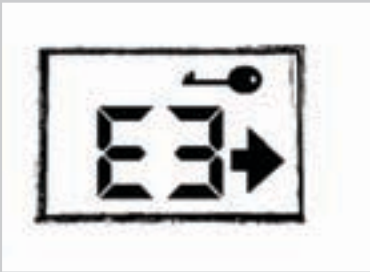


Continue to dial right until you reach the second number of your new combination, then stop. Within about 2 seconds, the symbol "E3" will appear.

9

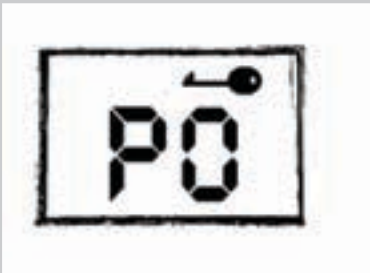

Continue to dial to the right until you reach the third and final number of your new combination, then stop. Your new combination will flash twice, then the symbol "PO" will appear.

10

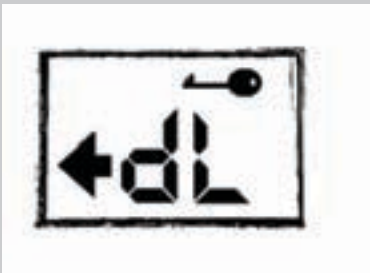

Pull out the change key, and the change key symbol will disappear and the symbol "dL" will appear.

OPERATING THE X-08 LOCK

The X-08 lock is an electro-mechanical combination lock. The majority of the insides of the lock are very sensitive electronics. Under no circumstances should the owner/user remove the back plate of these locks.

CHANGING THE COMBINATION:

11



Dial back to the left until the symbol "CC" appears prompting you to confirm the new combination.

12



Dial right and enter the new combination. After you have dialed the last number of the new combination, the symbol "OP" will appear. The new combination is now set.

If at any time during this process you are prompted with a lightning bolt or the display screen goes blank, the lock will revert to the old combination and the entire process must be started over.

It is always recommended that you try your new combination several times before security the container or vault, to ensure the new combination is stored in the lock.